


Volumes 200-2000 л  
 Working pressure tank 3 bar 95°C  
 Working pressure of the inner tank 6 bar 95°C



Stainless

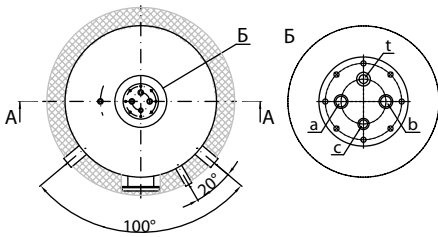

## VTA/N-2

- h1-h4 ..... Pipes and reverse routes of supply fueling circuits
- h5 ..... Nipple technology
- h6-h8 ..... Pipes temperature sensors
- h9 ..... Flange Ø 120mm
- e ..... Air vent
- a ..... Cold water
- b ..... Hot water
- c ..... Recirculation
- t ..... Pipe temperature sensor

V <sub>tank</sub> l	V <sub>inner tank</sub> l	Dimensions, mm				Mounting dimensions, mm									e	a, b	c	t
		H	ØD1	ØD	Ød	h1	h2	h3	h4	h5	h6	h7	h8	h9				
200	80,115	1330	700	500	400	251	647	-	1043	236	401	-	921	323	1/2"	3/4"	1/2"	1/2"
	1 1/2"					1 1/2"	1/2"	3/4"	3/4"									
300	80,115	1940	700	500	400	251	647	1168	1621	236	401	951	1521	323	1/2"	3/4"	1/2"	1/2"
	150,200					1 1/2"		1/2"	3/4"									
400	80,115,185	1720	800	600	450	264	834	-	1406	249	414	-	1256	336	1/2"	3/4"	1/2"	1/2"
	230					1 1/2"		1 1/2"	1/2"	3/4"	3/4"	3/4"						
500	80,115,185	1970	800	600	450	264	721	1118	1634	249	414	964	1534	336	1/2"	3/4"	1/2"	1/2"
	330					1 1/2"		1/2"	3/4"	1"	3/4"	1/2"						
750	115,185	2030	950	750	600	295	752	1212	1665	280	445	995	1565	367	1/2"	3/4"	1/2"	1/2"
	330,480					1 1/2"		1/2"	3/4"	1"	3/4"	1/2"						
1000	115,185	2080	1050	850	700	323	780	1240	1693	308	473	1023	1593	395	1/2"	3/4"	1/2"	1/2"
	330					1 1/2"		1/2"	3/4"	1"	3/4"	1/2"						
	770					1 1/2"		1/2"	3/4"	1 1/4"	1"	1/2"						
1500	115,200	2170	1200	1000	850	368	825	1285	1738	353	518	1068	1638	440	1/2"	3/4"	1/2"	1/2"
	330					1 1/2"		1/2"	3/4"	1"	3/4"	1/2"						
	580,700					1 1/2"		1/2"	3/4"	1 1/4"	1"	1/2"						
2000	115,200	2270	1400	1200	1000	419	876	1336	1789	404	569	1119	1669	491	1/2"	3/4"	1/2"	1/2"
	330					1 1/2"		1/2"	3/4"	1"	3/4"	1/2"						
	580,700					1 1/2"		1/2"	3/4"	1 1/4"	1"	1/2"						